

AcoustiQ Partition.

The AcoustiQ Partition range includes an assortment of hand selected patterns with hanging kits to mount to ceiling and floor. Theses screens provide a visual & acoustic barrier that is very suited to the modern open office, or activity based working environment.

Features

Thickness: 10mm

Density: 2kg/sqm

Material: 100% PET (60% recycled)

Classification & Testing

Fire Test: BS EN 13501.1

Classification: B-S1, D0

Sound Absorption: ASTM C-423 and ISO 11654

NRC Rating: 0.35 (w/ 50mm air gap)

Weighted Sound Absorption Coefficient: 0.95

VOC Emissions: ASTM D5116. Less than 0.02mg/ sqm/hr.

Formaldehyde free


Highly versatile - cut to desired shape /size (Cut in Australia)

Compatible with TextileSafe™ anti-microbial treatment:

Impact resistant

Humidity and moisture resista



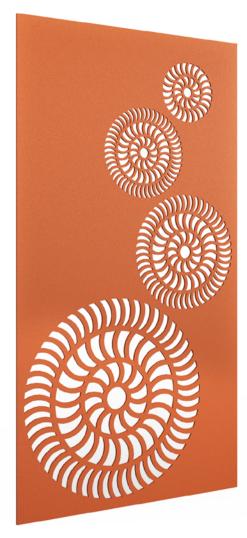

Dimensions

Hexagon

10mm adhesive backed hexagon tiles Pack of 12	300 mm
Square	
10mm adhesive backed hexagon tiles Pack of 8	600 mm
Cresent	
10mm adhesive backed hexagon tiles Pack of 12	400 mm
Triangles	
10mm adhesive backed hexagon tiles Pack of 24	800 mm

AcoustiQ Partition.

Finishing Options

Feature Examples



AcoustiQ Partition Triangle Pattern



AcoustiQ Partition Pebbles Pattern



AcoustiQ Partition Cresent Pattern



AcoustiQ Partition Hexagon Pattern



AcoustiQ Partition Angle Slots Pattern



AcoustiQ Partition Custom Art

AcoustiQ

Screen Colour Options

